

REVIZIONI OTVOR | HATCHES

Uputstvo za montažu | Mounting instructions

Tip | Model: Alumatic EI30, EI90

Pozicija | Position: Zid | Wall

Na zidnoj površini obeležite strukturalne dimenzije i potom isečite otvor u zidu (otpr. 3-5mm veći nego što su nominalne dimenzije otvora).

Mark the structural dimension and cut an opening into the wall (approx. 3-5 mm larger than the nominal dimensions).

Odvojite vratanca od rama, koji potom dijagonalno provucite kroz isečeni otvor i onda da sa pozadine pozicionirajte na sam otvor.




Hang out the detachable flap lid, insert diagonally the panel frame through the opening and place it there.

Pozicionirati pravilno ram uz poštovanje idealne horizontalnosti i vertikalnosti stranica, potom privremeno fiksirajte položaj rama otvora stegom i obeležite mesta za primenu vijaka. Osovinski razmak vijaka bi trebao biti ≤ 200 mm. U slučaju da je model revizionog otvora koji sprečava prenos vazduha i prašine, razmak rupa bi trebao biti ≤ 100 mm.

Adjust the frame (check angularity), fasten it and mark the drill holes. Drill distance ≤ 200 mm. Drill distance in case of access panel Alumatic "air- tight and dust-tight": ≤ 100 mm.

Najpre izbušite rupe bišilicom i burgijom prečnika 3mm i potom primenite vijke i zaštitne kapice koje su došle zajedno u setu.

Drill the mounting frame and fit the screws with the protective caps that are supplied along. Drill with a drilling machine of 3mm through the gypsum and the wings of the frame then place the screws.

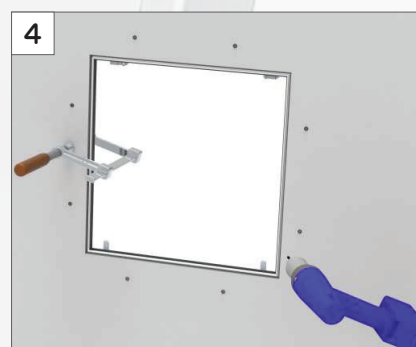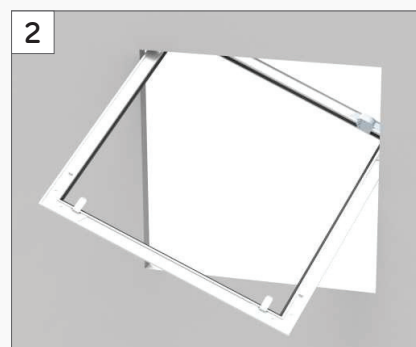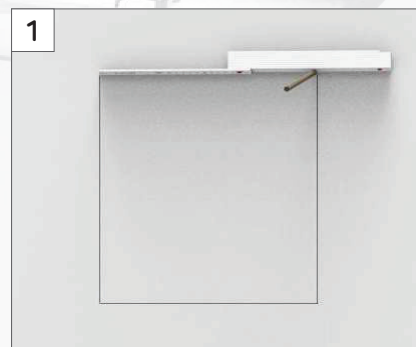

Šuplinu između rama i obodne gips kartonske ploče na zidu popuniti ispunom za spojeve. Po sušenju očistite stranice rama od ostataka ispune i drugih nečistoća nastalih tokom ugradnje.

Fill the mounting frame and the flap lid separately using a joint filler.
Clean the metallic interior and side surfaces of the mounting frame and the door leaf after further coating of putty and paint residues!

Potom je neophodno izvršiti test funkcionalnosti proizvoda (otvoriti, skinuti vratanca, vratiti ih, zatvoriti).

Then perform functional test (insert, close, open).
Fit the flap lid, fix the arresting device and close the flap lid.

Ne zaboraviti da je neophodna ugradnja okolne podrške od suvomontažnih profila sa razmakom od oko 5 mm do rama proizvoda.

Install the support profile CD with a gap of 5 mm at each side between the mounting frame.

Instalacija revizionog otvora je predviđena samo na zidovima koji su obostrano obloženi pločama u debljini 12.5mm ili 25mm. Model omogućava zaštitu od požara samo sa predviđene i definisane strane zida.

Installation in partitions, planked on both sides, 12,5 mm and 25 mm. The access panel allows access to the interior of the wall. The fire protection applies only to one side of the wall.

