

product data sheet



Siniat set

Createx jointing compound

Siniat **set** is a plaster based cement specifically developed for filling joints in the createx® system. Siniat set is a setting cement providing a strong resistant joint. It has a consistent working time of 45 minutes with a 60 minute setting time.

mastalite or mastaline are recommended for finishing createx® joints after applying Siniat set for easy sanding and a smooth finish.

performance

Mixing Mixes easily by hand or electric mixer to a smooth, creamy consistency.

Strength Fast strength development.


Easy Application Easy application due to its creamy consistency.

Low Shrinkage Less re-filling required due to its low shrinkage properties.

key benefits

- mixes easily to a creamy consistency
- stabilised set
- high joint strength



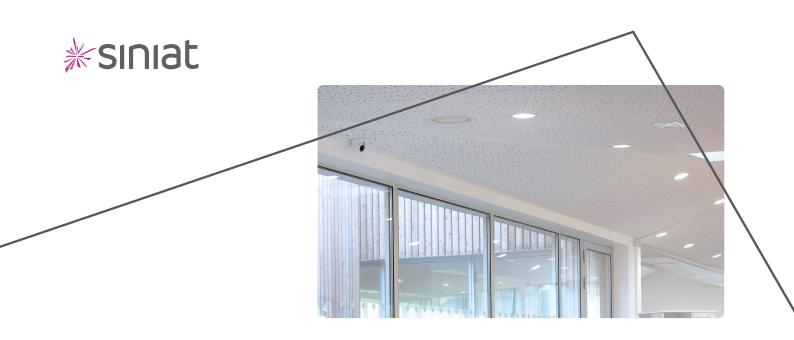

product information

product size	10 kg paper bag
type	Plaster based jointing compound
mixing ratio	1L of water to 2kg of Siniat set
working time	45 minutes
setting time	60 minutes
system usage	√crea tex® system

application

- Jointing must not be conducted until all ceiling services and access panels are installed in the ceiling, otherwise the excessive vibration may cause joint cracking or peaking.
- Use a wet brush to clean dust from joints after fixing the boards.
- Prime site cut edges with a PVA based primer (ie: one part of Bondcrete to four parts water). For improved jointing compound adhesion, factory V edge joints can also be primed.
- Pour the required amount of clean tap water into a container. Add the powder into water, mixing continuously to a smooth, thick consistency. Soaking is not recommended.
- Only mix enough jointing compound to be used in 45 minutes and do not contaminate with previously mixed batches. Once the material starts to set it cannot be remixed.
- Slightly overfill joints with Siniat set jointing compound and allow to dry. It is recommended to use a sausage caulking gun.
- After allowing to dry (approximately 1 hour depending on weather conditions), scrape off excess jointing compound to level the joint.
- Use mastalite, mastaglide, or mastaline for finishing joints and screw heads. Sand if necessary.
- Do not obstruct perforations during jointing.

optimise product performance by:

- Storing in a dry, well ventilated environment fully protected from the weather.
- Washing tools before product dries and hardens.
- Ensuring Siniat set does not dry out before setting has taken place under severe hot dry conditions.





ISO 9001 鑬 sai global



The management systems at our manufacturing plants are certified to ISO 9001 for quality management systems, ISO 14001 certification for environmental management systems and ISO 45001 certification for health & safety management systems.

The following Siniat products have been independently certified by Global GreenTag to GreenRate Level A: mastashield, fireshield, fireshield h, soundshield, watershield, spanshield, multishield, curveshield, opal, trurock and trurock hd. Compliance certificates are available on siniat.com.au.



A wide range of Siniat plasterboard and metal products are available under the Opt2Act carbon neutral program to help you achieve your sustainability goals. Visit siniat.com.au to find out more.

Disclaimer

Products manufactured and systems designed by Etex Australia Pty Ltd and branded Siniat, are produced in accordance with the Building Code of Australia and relevant Australian Standards. Information in this document is to be used as a guide only and is subject to project approval as many aspects of construction are not comprehensively covered. It is also the responsibility of the project to determine if Siniat's products and systems are suitable for the intended application. Etex Australia Pty Ltd will not be held responsible for any claims resulting from the installation of its products or other associated products not in accordance with the recommendations of the manufacturer's technical literature or relevant Australian Standards. Siniat technical information is regularly updated. To ensure this document is current with the latest information, visit siniat.solutions

Siniat.solutions provides a host of online solutions for your product

SINIAL SELECT

offers an online system selector and custom design specification proposal, developed by us and catered to your project's requirements.

SINIAt CALCULATE®

is a range of online calculation tools for the professional. Explore siniat. solutions on siniat.com.au.



Etex Australia Pty Ltd

ABN 61 003 621 010 31 Military Road, Matraville NSW 2036

siniat.com.au



warranty

Siniat's products are guaranteed by a 10 Year Warranty. For details visit siniat.com.au

technical advice AU 1300 724 505

