



红龙 Red Dragon All Purpose

jointing compound
填缝剂

Western Australia Only

Red Dragon is a lightweight jointing compound with superior working qualities, providing a smooth texture and adequate open time for a perfect finish.

Easy to sand, **Red Dragon** is specially formulated to provide excellent bond in embedding and concealing fasteners, corner beads and trim.

performance

Body

Good for both hand and mechanical tools.

Drying

Convenient drying time to obtain thin edges when feathering as it does not dry too fast.

Sanding

Can be sanded by hand or by electric sanders. Leaves a professional finish.

Safe to Use

Low VOC meeting sustainable building project requirements.

key benefits

- ready to use
- provides excellent bond
- sands easily with low shrinkage



product information

product size	20kg bucket
type	Mid weight air drying premixed all purpose compound
drying time	Allow 24 hours. Drying time varies depending on temperature and humidity.
system usage	✓ Bedding ✓ Second coat ✓ Final coat ✓ Standard ✓ Fire Rated
approximate density	1.37 g/cm ³

application

- Test for desired consistency depending on application method to be used. **Red Dragon** is ready to use for hand trowelling. For mechanical tools, if necessary add clean tap water in small amounts and mix until desired consistency is achieved.
- As with all compounds, excessive thinning may cause cracking or increased shrinkage. Do not mix with any other material.
- Maintain a minimum 10°C working temperature during application and drying.
- When using glass fibre tape or **Red Dragon** for all three coats, joints must be backblocked. Paper tape is recommended for use with **Red Dragon**.
- For a stronger joint, use paper tape and bedding cement for the first coat, then use **Red Dragon** for the top two coats.
- Allow **Red Dragon** to dry completely between coats and approximately 24 hours before sanding.
- Sand with 220 grit sand paper.
- **Red Dragon** will accept most types of decorative finishes. In accordance with AS/NZS 2311 Guide to the painting of buildings, a three coat paint system must be used. This consists of a sealer/undercoat and two coats of paint.

optimise product performance by:

- Firmly closing the lid to prevent the compound from drying out.
- Washing tools before product dries and hardens.



Quality
ISO 9001
SAI GLOBAL


All Siniat products have been developed to meet the specific needs of the Australian market. Products manufactured in Australia comply with quality systems certified as complying with AS/NZS ISO 9001:2008 and meet the requirements of AS/NZS 2588, Gypsum Plasterboard.



The following Siniat products have been independently certified by Global GreenTag to GreenRate Level A: **mastashield**, **fireshield**, **impactshield**, **soundshield**, **watershield**, **spanshield**, **multishield**, **curveshield**, **opal**, **trurock**, **trurock hd**, **shaftliner** and **intershield**. Compliance certificates are available on siniat.com.au.



A wide range of plasterboard and metal products are available under the Opt2Act carbon neutral program. Opted-in products are certified carbon neutral by Climate Active. Visit www.siniat.com.au/opt2act to find out more.

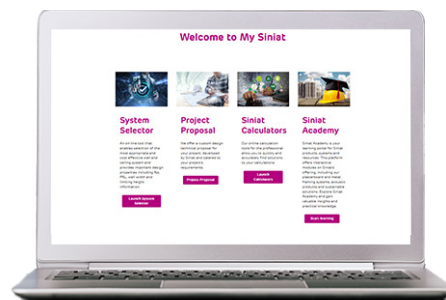

Register for My Siniat!

My Siniat is an online technical hub where you can access everything you need for a compliant and successful project. It is your all-in-one digital platform for specifying, planning, and managing your Siniat wall and ceiling systems.

By registering for this platform, you will gain exclusive access to technical content, including System Selector, Project Proposal and the Siniat BIM and CAD Library.

You will also gain access to the **Siniat Academy** - a valuable training portal that provides a range of courses to learn more about our products and their applications. Courses are delivered in a fun and interactive way, and a certificate of completion is provided at the end of each module.

Register for My Siniat on siniat.com.au.



Etex Australia Pty Ltd

ABN 61 003 621 010
31 Military Road, Matraville
NSW 2036

siniat.com.au



warranty

Siniat's products are guaranteed by a 10 Year Warranty. For details visit siniat.com.au

technical advice
AU 1300 724 505

Disclaimer

Products manufactured and systems designed by Etex Australia Pty Ltd and branded Siniat, are produced in accordance with the Building Code of Australia and relevant Australian Standards. Information in this document is to be used as a guide only and is subject to project approval as many aspects of construction are not comprehensively covered. It is also the responsibility of the project to determine if Siniat's products and systems are suitable for the intended application. Etex Australia Pty Ltd will not be held responsible for any claims resulting from the installation of its products or other associated products not in accordance with the recommendations of the manufacturer's technical literature or relevant Australian Standards. Siniat technical information is regularly updated. To ensure this document is current with the latest information, visit siniat.com.au