



## mastalite

### finishing compound

**mastalite** is a premium premixed all purpose jointing compound suitable for bedding tape, second and final coating plasterboard joints and fastener heads. It is a lightweight compound and is ideal for use with mechanical tools. **mastalite** is the perfect solution for finishing plasterboard joints when superior coverage and finish are desired for any commercial or residential project.

### performance

#### Body

Exceptional body and ease of trowelling for both hand and mechanical tools. **mastalite** will maintain body when mixed or worked on the hawk.

#### Drying

The perfect amount of time to obtain good thin edges when feathering as it does not dry out too fast.

#### Colour

A very light colour when applied, drying to a clean white professional finish.

#### Sanding

Quick and very easy to sand by hand or by electric sanders. Leaves a finish which is free from scratches and swirl marks.

#### Sustainable

Low VOC meeting sustainable building project requirements.

### key benefits

- good body
- easy sanding
- free flowing



## product information

product size	17kg bucket
type	Light weight air drying premixed all purpose compound
drying time	Allow 24 hours. Drying time varies depending on temperature and humidity.
system usage	✓ Bedding   ✓ Second Coat   ✓ Final coat   ✓ Standard   ✓ Fire rated
voc	<50g/L
approximate density	1.17 g/cm <sup>3</sup>

## application

- Test for desired consistency depending on application method to be used. **mastalite** is ready to use for hand trowelling. For mechanical tools, if necessary add clean tap water in small amounts and mix until desired consistency is achieved.
- As with all compounds, excessive thinning may cause cracking or increased shrinkage. Do not mix with any other material.
- Maintain a minimum 10°C working temperature during application and drying.
- When using **mastalite** for all three coats, joints must be back-blocked.
- For a stronger joint, use paper tape and bedding cement for the first two coats.
- A three coat paint system must be used in accordance with AS/NZS 2311 Guide to the painting of buildings. This consists of a sealer undercoat and two coats of paint.
- Both the quality of the paint and how it is applied have a large effect on the finished appearance of the plasterboard. The paint manufacturer's instructions for application must be followed. To achieve the best result it is strongly recommended that each coat of the three coat paint system be roller applied.
- Allow **mastalite** to dry completely between coats and approximately 24 hours before sanding.
- Sand with 180 to 220 grit sand paper.

## optimise product performance by:

- Firmly closing the lid to prevent the compound from drying out.
- Washing tools before product dries and hardens.



The following Siniat products have been independently certified by Global GreenTag to GreenRate Level A: **mastashield**, **fireshield**, **impactshield**, **soundshield**, **watershield**, **spanshield**, **multishield**, **curveshield**, **opal**, **trurock**, **trurock hd**, **shaftliner** and **intershield**. Compliance certificates are available on [siniat.com.au](http://siniat.com.au).



Quality  
ISO 9001




All Siniat products have been developed to meet the specific needs of the Australian market.

All Siniat Australian manufacturing sites comply with AS/NZ ISO 9001.



A wide range of plasterboard and metal products are available under the Opt2Act carbon neutral program. Opted-in products are certified carbon neutral by Climate Active. Visit [www.siniat.com.au/opt2act](http://www.siniat.com.au/opt2act) to find out more.

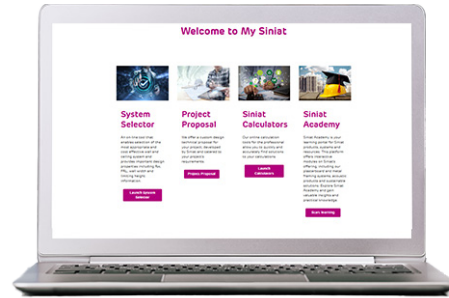

## Register for My Siniat!

My Siniat is an online technical hub where you can access everything you need for a compliant and successful project. It is your all-in-one digital platform for specifying, planning, and managing your Siniat wall and ceiling systems.

By registering for this platform, you will gain exclusive access to technical content, including System Selector, Project Proposal and the Siniat BIM and CAD Library.

You will also gain access to the **Siniat Academy** - a valuable training portal that provides a range of courses to learn more about our products and their applications. Courses are delivered in a fun and interactive way, and a certificate of completion is provided at the end of each module.

Register for My Siniat on [siniat.com.au](http://siniat.com.au).



**Etex Australia Pty Ltd**

ABN 61 003 621 010  
31 Military Road, Matraville  
NSW 2036

**[siniat.com.au](http://siniat.com.au)**



### warranty

Siniat's products are guaranteed by a 10 Year Warranty. For details visit [siniat.com.au](http://siniat.com.au)

technical advice  
**AU 1300 724 505**

### Disclaimer

Products manufactured and systems designed by Etex Australia Pty Ltd and branded Siniat, are produced in accordance with the Building Code of Australia and relevant Australian Standards. Information in this document is to be used as a guide only and is subject to project approval as many aspects of construction are not comprehensively covered. It is also the responsibility of the project to determine if Siniat's products and systems are suitable for the intended application. Etex Australia Pty Ltd will not be held responsible for any claims resulting from the installation of its products or other associated products not in accordance with the recommendations of the manufacturer's technical literature or relevant Australian Standards. Siniat technical information is regularly updated. To ensure this document is current with the latest information, visit [siniat.com.au](http://siniat.com.au)